


Dimensions

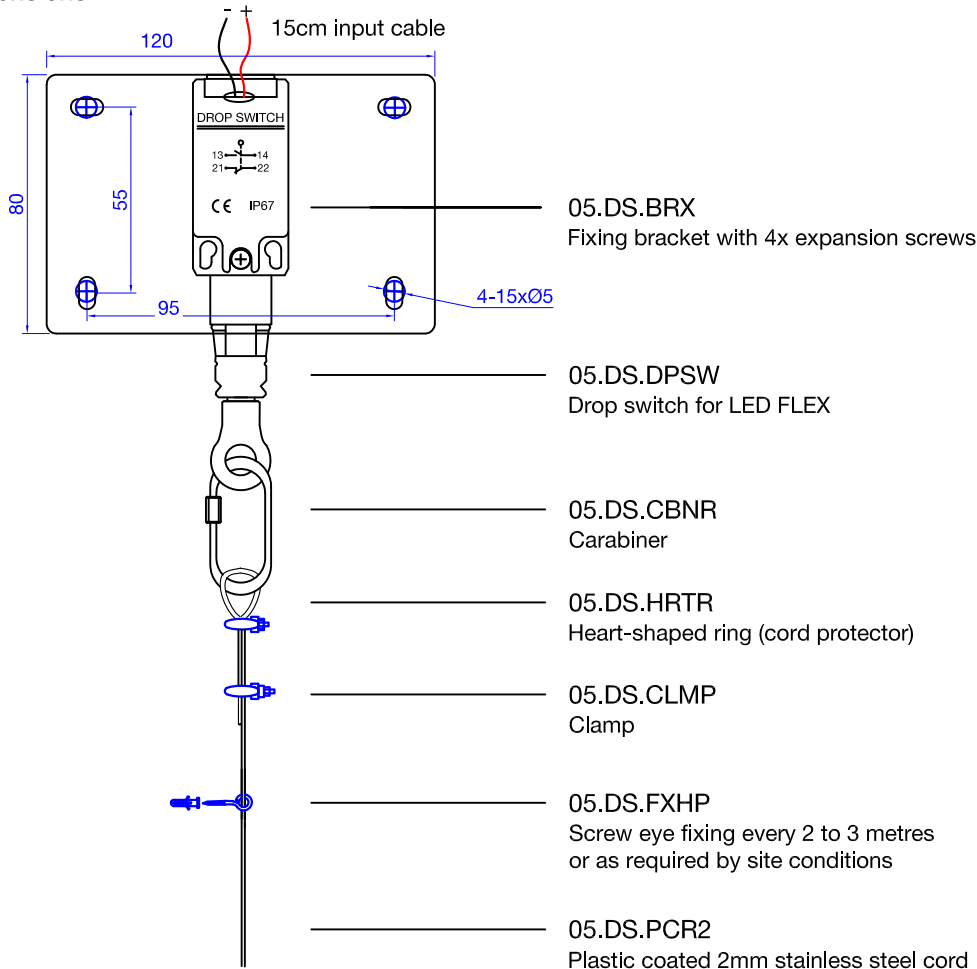

Specifications

Operating speed	Operating temperature	Rated current/voltage
0.05mm - 500mm/sec	-25°C to +80°C / -13°F to +176°F	10A / 600VAC(EN60947-5-1), AC15 A600 / DC13 Q300
Contact resistance	Humidity	Service life
<25MΩ	<95%RH	Mechanical 1.0x10 ⁷ (operations) / Electrical 5.0x10 ⁵ (operations)
Contact block	Relay	Protection rating
SL slow action	1NO + 1NC	IP67

! Installation Notes

1. Maximum working voltage is 600VAC.
2. Installation and maintenance should be performed by qualified personnel only.
3. Switch off mains power before installation and maintenance.
4. Prior to turning the power on, ensure there is no current leakage.
5. The drop switch should never be covered by any thermal insulation material.